

SlowStop® Energy Absorbing Bollard – Type 2.5 (SS-T2.5Y-100)



www.slowstop.eu

Introduced to fit between our Type 2 and Type 3 models, the Type 2.5 is cost efficient for heavy duty applications with limited speeds or vehicle masses. Protect against heavy fork lifts and slow moving medium lorries.

Color: RAL 1023 Yellow Bollard on RAL 9005 Black Base



Diameter: 139,7 mm (6,3 mm wall)

Height: 100 cm

Set Screws: 6 M16 x 2,00
8mm Hex

Cap: Black Plastic

Installs with six (6)
Concrete Anchor Screws

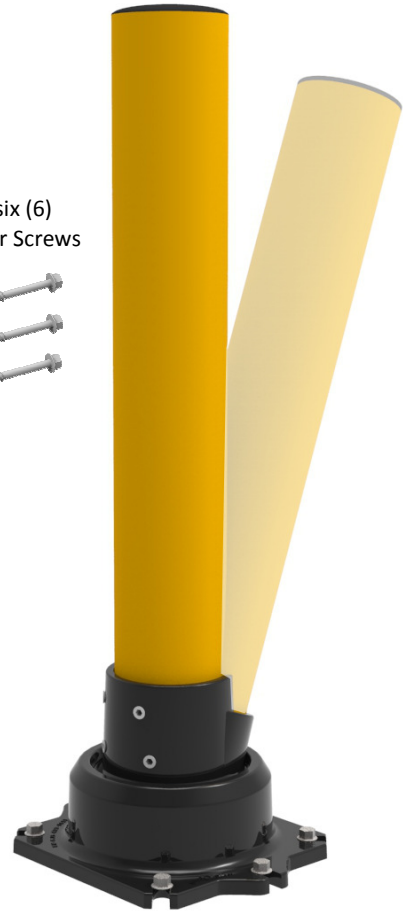

MASS (KG)	3000	4000	5000	6000	7000	8000	9000	10000	15000	20000	25000
SPEED (KPH)											
3.0											
3.5											
4.0											
4.5											
5.0											
5.5											
6.0											
6.5											
7.0											
7.5											
8.0											
8.5											
9.0											
9.5											

No Damage / Negligible Damage
Will Stop / Potential Damage to Guard
Guard is under-sized

SPECIFICATIONS

- Stopping Power Rating: 14.000 joules
- Temperature Rating: -40° to 70°C
- Pipe Coating: EN-ISO 1461 Galvanized + Polyester Powder Coat
- Base Coating: Environmentally Friendly Water-Based KTL Coating + Polyester Powder Coat. C5I corrosion resistance.
- Frangible base eliminates floor damage. Safe for structural concrete.

RECOMMENDED USES



- Heavy Equipment Guarding
- Door and Wall Protection
- Parking Facilities
- Utility Protection
- Pedestrian Safety
- Access Denial
- Fuel Pump Protection
- Not for Hostile Vehicle Security



4955 Stout Dr. • San Antonio, TX 78219
TEL: +1 (210) 736 4477 • FAX: +1 (210) 734 6448
Email: info@slowstop.eu
www.slowstop.eu



QR: Download Spec Sheets
©2019 SlowStop. All rights reserved. 15-NOV-2018