

SlowStop® Rebounding Horseshoe Bollard – Type 2 (SS-T2Y-80-HS-100)



www.slowstop.eu

Color: RAL 1023 Yellow Bollard on RAL 9005 Black Base


Diameter: 101,6 mm (6,3 mm wall)

Height: 80 cm to centerline

Width: 100 cm centers
110 cm outside uprights
125 cm overall footprint

Set Screws: M16 x 2,00—8mm Hex

Weight: 90 kg

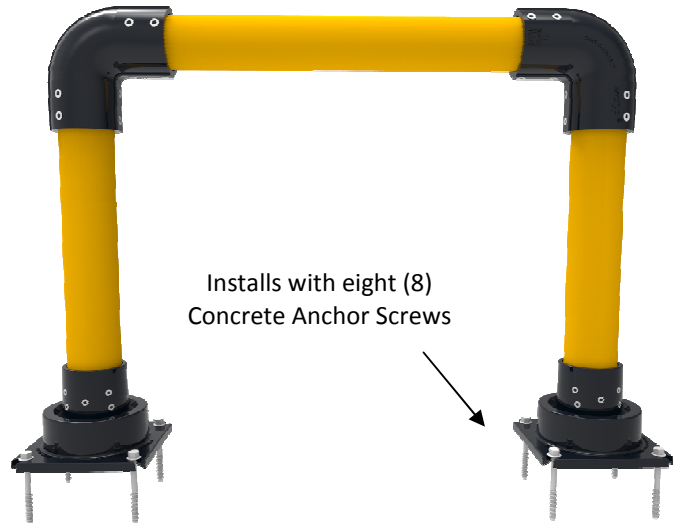

Installs with eight (8)
Concrete Anchor Screws

MASS (KG)	1000	2000	3000	4000	5000	7500	10000	12500	15000	20000
SPEED (KPH)										
3.0	Green	Green	Green	Green	Green	Green	Green	Green	Yellow	Yellow
3.5	Green	Green	Green	Green	Green	Green	Green	Yellow	Yellow	Red
4.0	Green	Green	Green	Green	Green	Green	Yellow	Yellow	Red	Red
4.5	Green	Green	Green	Green	Green	Yellow	Yellow	Red	Red	Red
5.0	Green	Green	Green	Green	Yellow	Yellow	Red	Red	Red	Red
5.5	Green	Green	Green	Green	Yellow	Yellow	Red	Red	Red	Red
6.0	Green	Green	Green	Yellow	Yellow	Red	Red	Red	Red	Red
6.5	Green	Green	Yellow	Yellow	Yellow	Red	Red	Red	Red	Red
7.0	Green	Green	Yellow	Yellow	Red	Red	Red	Red	Red	Red
7.5	Green	Green	Yellow	Yellow	Red	Red	Red	Red	Red	Red
8.0	Green	Yellow	Yellow	Red	Red	Red	Red	Red	Red	Red
8.5	Green	Yellow	Yellow	Red	Red	Red	Red	Red	Red	Red
9.0	Green	Yellow	Yellow	Red	Red	Red	Red	Red	Red	Red
10.0	Green	Yellow	Red	Red	Red	Red	Red	Red	Red	Red

No Damage / Negligible Damage
Will Stop / Potential Damage to Guard
Guard is under-sized

SPECIFICATIONS

- Stopping Power Rating: 9.429 joules @ 45° Impact
- Temperature Rating: -40° to 70°C
- Pipe Coating: EN-ISO 1461 Galvanized + Polyester Powder Coat
- Base Coating: Environmentally Friendly Water-Based KTL Coating + Polyester Powder Coat. C5I corrosion resistance.
- Frangible base eliminates floor damage. Safe for structural concrete.

RECOMMENDED USES



- Powered Industrial Trucks to 5000 kg lift capacity
- Equipment and Conveyor Guarding
- Toll and Security Booths
- Utility and Kiosk Protection
- Access Denial
- Fuel Pump Protection
- Storage Tanks
- Not for Hostile Vehicle Security



4955 Stout Dr. • San Antonio, TX 78219
 TEL: +1 (210) 736 4477 • FAX: +1 (210) 734 6448
 Email: info@slowstop.eu
www.slowstop.eu



QR: Download Spec Sheets
 ©2019 SlowStop. All rights reserved. 15-NOV-2018