

# SlowStop® Rebounding Horseshoe Bollard – Type 3 (SS-T3Y-68-HS-112) Heavy Duty Horseshoe Guarding



[www.slowstop.eu](http://www.slowstop.eu)

Color: RAL 1023 Yellow Bollard on RAL 9005 Black Base


Diameter: 177,8 mm (8 mm wall)

Height: 68 cm to centerline

Width: 112 cm centers  
130 cm outside uprights  
153 cm overall footprint

Set Screws: M16 x 2,00—8mm Hex

Weight: 190 kg

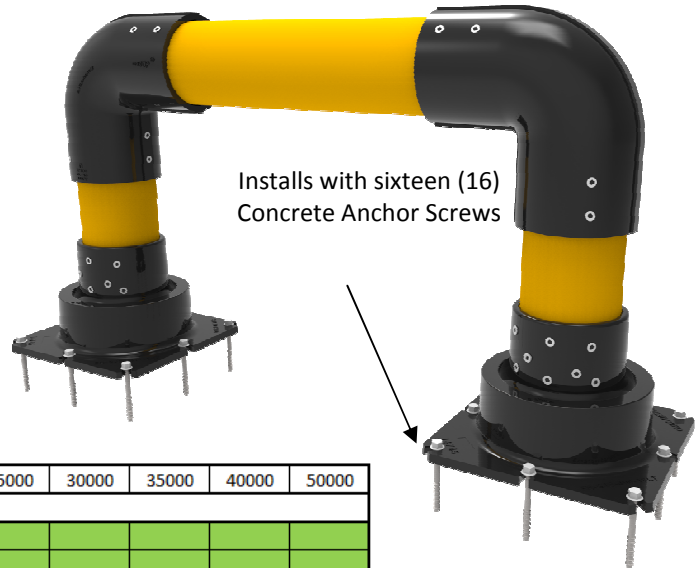

Installs with sixteen (16) Concrete Anchor Screws

MASS (KG)	5000	10000	15000	20000	25000	30000	35000	40000	50000
SPEED (KPH)									
3.0	Green	Green	Green	Green	Green	Green	Green	Green	Green
3.5	Green	Green	Green	Green	Green	Green	Green	Green	Green
4.0	Green	Green	Green	Green	Green	Green	Green	Green	Green
4.5	Green	Green	Green	Green	Green	Green	Yellow	Yellow	Yellow
5.0	Green	Green	Green	Green	Green	Yellow	Yellow	Yellow	Yellow
5.5	Green	Green	Green	Green	Yellow	Yellow	Yellow	Yellow	Yellow
6.0	Green	Green	Green	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
6.5	Green	Green	Green	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
7.0	Green	Green	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
7.5	Green	Green	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
8.0	Green	Green	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
8.5	Green	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
9.0	Green	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
10.0	Green	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow

No Damage / Negligible Damage  
Will Stop / Potential Damage to Guard  
Guard is under-sized

### SPECIFICATIONS

- Stopping Power Rating: 50.782 joules @ 45° Impact
- Temperature Rating: -40° to 70°C
- Pipe Coating: EN-ISO 1461 Galvanized + Polyester Powder Coat
- Base Coating: Environmentally Friendly Water-Based KTL Coating + Polyester Powder Coat. C5I corrosion resistance.
- Frangible base eliminates floor damage. Safe for structural concrete.

### RECOMMENDED USES

- Powered Industrial Trucks to 10000+ kg lift capacity
- Loading Docks and Warehouse Entrance Ramps
- Equipment Guarding
- Heavy Truck Areas
- Generator, Utility, Tank Protection
- Access Denial
- Post-tensioned Concrete
- Not for Hostile Vehicle Security



4955 Stout Dr. • San Antonio, TX 78219  
TEL: +1 (210) 736 4477 • FAX: +1 (210) 734 6448

Email: [info@slowstop.eu](mailto:info@slowstop.eu)  
[www.slowstop.eu](http://www.slowstop.eu)



QR: Download Spec Sheets  
©2019 SlowStop. All rights reserved. 15-NOV-2018