

# SlowStop® Energy Absorbing Bollard – Type 3 (SS-T3Y-100)



[www.slowstop.eu](http://www.slowstop.eu)

The strongest surface mount bollard available. For maximum protection in the most difficult applications.

**Color:** RAL 1023 Yellow Bollard on RAL 9005 Black Base



**Diameter:** 177,8 mm (8 mm wall)

**Height:** 100 cm

**Set Screws:** 8 M16 x 2,00  
8mm Hex

**Cap:** Black Plastic

Installs with eight (8)  
Concrete Screw Anchors

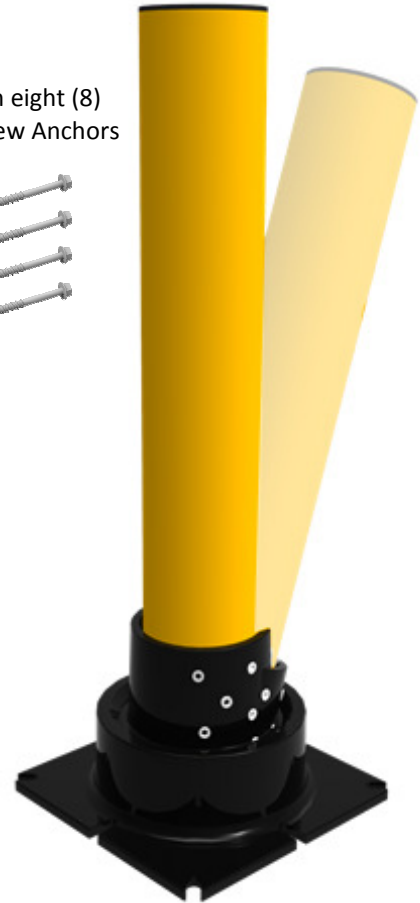

MASS (KG)	2000	4000	6000	8000	10000	15000	20000	25000	30000	35000	40000
SPEED (KPH)											
3.0	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
3.5	Green	Green	Green	Green	Green	Green	Green	Green	Yellow	Yellow	Yellow
4.0	Green	Green	Green	Green	Green	Green	Green	Yellow	Yellow	Yellow	Yellow
4.5	Green	Green	Green	Green	Green	Green	Yellow	Yellow	Yellow	Yellow	Yellow
5.0	Green	Green	Green	Green	Green	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
5.5	Green	Green	Green	Green	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
6.0	Green	Green	Green	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
6.5	Green	Green	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
7.0	Green	Green	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
7.5	Green	Green	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
8.0	Green	Green	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
8.5	Green	Green	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
9.0	Green	Green	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
9.5	Green	Green	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow

No Damage / Negligible Damage  
Will Stop / Potential Damage to Guard  
Guard is under-sized

### SPECIFICATIONS

- Stopping Power Rating: 25.800 joules
- Temperature Rating: -40° to 70°C
- Pipe Coating: EN-ISO 1461 Galvanized + Polyester Powder Coat
- Base Coating: Environmentally Friendly Water-Based KTL Coating + Polyester Powder Coat. C5I corrosion resistance.
- Frangible base eliminates floor damage. Safe for structural concrete.

### RECOMMENDED USES

- Loading Docks and Warehouse Entrance Ramps
- Equipment Guarding
- Wall and Door Protection
- Utility Protection
- Pedestrian Safety
- Fuel Pump Protection
- Storage Tanks
- Not for Hostile Vehicle Security



4955 Stout Dr. • San Antonio, TX 78219  
TEL: +1 (210) 736 4477 • FAX: +1 (210) 734 6448

Email: [info@slowstop.eu](mailto:info@slowstop.eu)  
[www.slowstop.eu](http://www.slowstop.eu)



QR: Download Spec Sheets  
©2019 SlowStop. All rights reserved. 15-NOV-2018